


Sodinette SE 250 W - 1000 W

Nominal wattage (W)	250	400	600	1000	
Nominal length (mm)	227	292	292	360	
Diameter (mm)	91	122	122	165	
Light Center length (mm)	-	-	-	-	
Weight (g)	200	250	260	410	
Colour Rendering Index (CRI)	≤ 25	≤ 25	≤ 25	≤ 25	
Temp. for max. luminous flux (°C)	25 ± 5	25 ± 5	25 ± 5	25 ± 5	
Correlated Colour Temp. CCT (K)	2100	2100	2100	2100	
Nominal flux ¹⁾ @ 25 °C (lm)	30500	52000	84000	131000	
Lamp efficacy ¹⁾ @ 25 °C (lm/W)	122	130	140	131	
Energy Class	A+	A+	A++	A+	
kW/1000 hrs	275	440	660	1100	
Rated Wattage (W)					
	250	400	600	1000	
Lamp voltage (V)					
	100	105	105	110	
Lamp current (A)					
	3,0	4,4	6,2	10,3	
LLMF - Lamp Lumen Maintenance Factor	2,000 h	0,99			
	4,000 h	0,98			
	6,000 h	0,97			
	8,000 h	0,96			
	12,000 h	0,94			
	16,000 h	0,92			
	20,000 h	0,91			
	24,000 h	0,89			
	30,000 h	0,88			
	36,000 h	0,87			
	48,000 h	0,85			
	LSF - Lamp Survival Factor	2,000 h	1		
		4,000 h	1		
6,000 h		0,99			
8,000 h		0,99			
12,000 h		0,98			
16,000 h		0,98			
20,000 h		0,96			
24,000 h		0,95			
30,000 h		0,94			
36,000 h		0,93			
48,000 h	0,9				
Operation for LLMF / LSF-values		Magnetic ballast			
Dimmable		Yes			
Cap		E40			
Burning position		Universal			
Mercury content per burner (mg)		25	30	35	40
IEC		60662			

1) After 100 h

Switching cycle	Life time (h)
12B10	48.000
Average lifetime	70.000

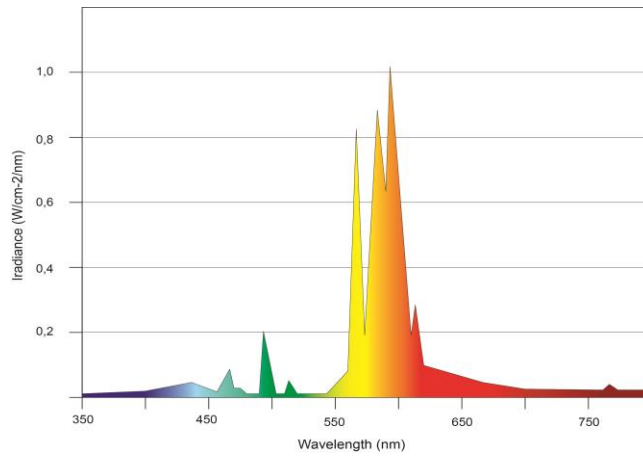

Packing data	250	400	600	1000
Box size (mm)	350 x 250 x 280	440 x 310 x 335		590 x 405 x 405
Lamps per box	6			
Weight per box (kg)	2,4	3,4	3,6	5,3