


Part Z Ceiling

A functional luminaire for offices and schools



Part Z is a family of typical office and school luminaires for ceiling and pendant mounting. It has an efficient glare reducing louvre with parabolic side reflectors and square lamellas in aluminium. Part Z comes in two lengths with white steel housing. Available as on/off or DALI dimmable.

- Energy efficient - up to 123 lm/W
- Parabolic louvre
- DALI versions
- 5 year guarantee

IP20




LED



CE

PART Z CEILING


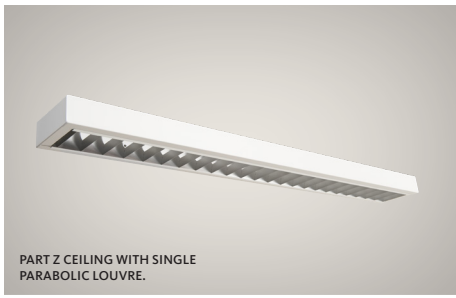


APPLICATIONS: Offices, schools and circulation areas.

MATERIAL: Housing made of painted steel. Single parabolic MIRO 5 semi-diffuse aluminium louvre. LED cover in polycarbonate.

INSTALLATION AND CONNECTION: The housing has four mounting holes, $\varnothing=6$ mm. Connection via push-in terminal 2,5mm². Looping possible. Cable entries near center of luminaire.

TECHNICAL DATA: 220-240 V, 50-60 Hz, Power factor $\lambda >0,95$. IP20. CE. CRI >80 . SDCM 3. LED lifetime 55 000 h (L80B50). Constant current LED driver. Non-dim or DALI dimmable. Driver lifetime $>50\ 000$ hours. Ambient temperature: $+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$.

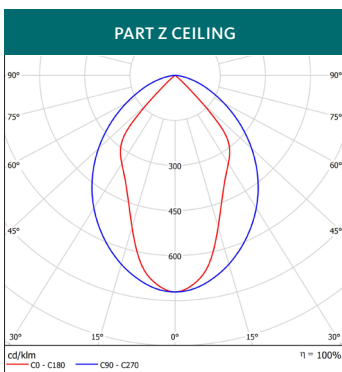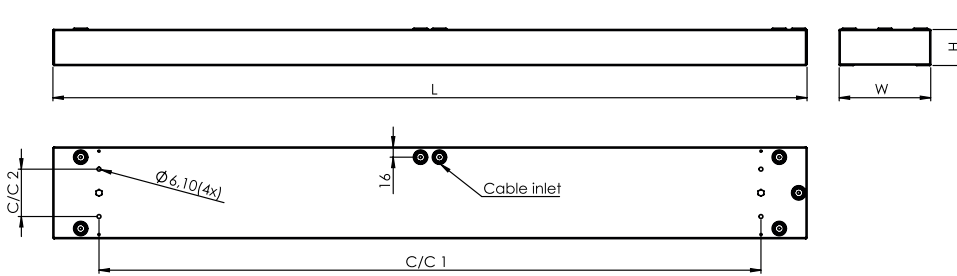

TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	C-C 1 (mm)	C-C 2 (mm)
Part Z CE 3000 Part Z CE 5000	1195	145	57	1050	75
Part Z CE 4200 Part Z CE 6700	1495	145	57	1350	75

MODELS	TYPE	SYSTEM POWER (W)	LUMINOUS FLUX (lm)	LUMINAIRE EFFICACY (lm/W)	WEIGHT (kg)	ARTICLE NO. ON/OFF	ARTICLE NO. DALI	
	Part Z Ceiling on/off							
	Part Z CE PAR 26W 3000 On/Off 830 White	26	2970	114	3,8	238133000	-	
	Part Z CE PAR 26W 3000 On/Off 840 White	26	3120	120	3,8	238143000	-	
	Part Z CE PAR 35W 4200 On/Off 830 White	35	4100	117	4,7	238134200	-	
	Part Z CE PAR 35W 4200 On/Off 840 White	35	4290	123	4,7	238144200	-	
	Part Z CE PAR 46W 5000 On/Off 830 White	46	4840	105	3,8	238135000	-	
	Part Z CE PAR 46W 5000 On/Off 840 White	46	5070	110	3,8	238145000	-	
	Part Z CE PAR 58W 6700 On/Off 830 White	58	6390	110	4,7	238136700	-	
	Part Z CE PAR 58W 6700 On/Off 840 White	58	6700	116	4,7	238146700	-	
Part Z Ceiling DALI								
Part Z CE PAR 26W 3000 DALI 830 White	26	2970	114	3,8	-	238133020		
Part Z CE PAR 26W 3000 DALI 840 White	26	3120	120	3,8	-	238143020		
Part Z CE PAR 35W 4200 DALI 830 White	35	4100	117	4,7	-	238134220		
Part Z CE PAR 35W 4200 DALI 840 White	35	4290	123	4,7	-	238144220		
Part Z CE PAR 46W 5000 DALI 830 White	46	4840	105	3,8	-	238135020		
Part Z CE PAR 46W 5000 DALI 840 White	46	5070	110	3,8	-	238145020		
Part Z CE PAR 58W 6700 DALI 830 White	58	6390	110	4,7	-	238136720		
Part Z CE PAR 58W 6700 DALI 840 White	58	6700	116	4,7	-	238146720		



All specifications are subject to change. For the latest version of this product leaflet, please visit www.auralight.com/products.

2019-02-28